

AENOR

AENOR Product Certificate Clay products for construction



034/001927

AENOR certifies that the organization

TEJAS VEREA, S.A.

registered office	LANZÁ, S/N 15685 MESÍA (A Coruña - España)
supplies	Clay roofing tiles and fittings
in compliance with	UNE-EN 1304:2014 (EN 1304:2013)
Nº Technical Form	2060201 (see annex)
Production site	390508 - 390505
Certification scheme	This Certificate has been granted in accordance with the stipulations of the Specific Rules RP 034.02
	This certificate supersedes 034/001927, dated 2018-06-28
First issued on	2016-04-05
Modified on	2019-08-22
Validity date	2024-08-22

A handwritten signature in blue ink, appearing to read 'Rafael Garcia Meiro'.

Rafael GARCÍA MEIRO
Chief Executive Officer


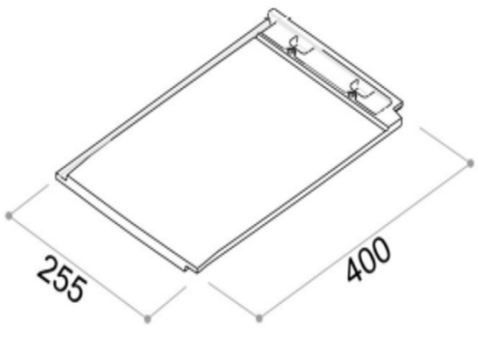
Original Electronic Certificate

AENOR INTERNACIONAL S.A.U.
Génova, 6. 28004 Madrid. España
Tel. 91 432 60 00.- www.aenor.com

Product certification body accredited by ENAC, number 01/C-PR271

AENOR MARK FOR CLAY ROOFING TILES AND FITTINGS

TECHNICAL FORM N°: 2060201

Stamp and signature:	LICENSE HOLDER:	TEJAS VEEA, S.A.			AENOR  Certified Product							
	MADE IN:	390508-390505										
	TILE DESCRIPTION:	OVER & UNDER TILE EN 1304										
	BRAND NAME:	TEJA VEEA PLANA										
PRODUCT TECHNICAL CHARACTERISTICS												
MANUFACTURER GUARANTEED VALUES					AENOR REQUIRED VALUES							
REQUIRED												
Nominal dimensions (mm)				Structural characteristics (% faults)	EN 1304	LCA 2,5 (I)	LCA 2,5 (I)					
		Length	Width									
Individuals		X	400	255	Length tolerance (%)	EN 1024	± 2,0	± 2,0				
Overlap									Width tolerance (%) (not applicable in Over and Under)	± 2,0	± 2,0	
Over and Under Tiles		Maximum width		Minimum width								
Impermeability		Category 1		X	Uniformity of the transverse profile (mm) (Only for Over and Under Tiles)	EN 1024	N/A	N/A				
		Category 2										
Frost resistance		Level 1 (n° cycles without damages ≥ 150)		X	Camber/Twist (%)	EN 539-1	≤ 1,5	≤ 1,5				
		Level 2 (n° cycles without damages ≥ 90)										
OPTIONAL CHARACTERISTICS ANNEX D RP 34 02												
		YES		NO	Impermeability (cm ³ /cm ² * d)	EN 539-1	≤ 0,5	≤ 0,5				
Impermeability (D.2 RP 34.02)				X					Mean Value	D.2 RP 34.02	N/A	N/A
Frost Resistance (D.3 RP 34.02)				X					Individual Value			
									Mean Value			
					Individual Value							
TILE SKETCH												
												
Piece without water repellent treatment												
Accessories:												
Hip & Ridge and Straight Rake (manufactured at the factory of Vereja in Lanzá-Mesia, Spain)												
Additional information given by the manufacturer ⁽¹⁾												
Unitary mass (in grams):				2950								
Roof tiles number in m ² (with one decimal):				12,5								
Length distance between battens (cm):				33								
Surface finish:		Decoration with colored engobes										
Mass coloration:		Red, graphite										
Fixing types:		Hook, screw										
Further information:		Grade 1 according to ASTM C-1167 (<6% water absorption)										

⁽¹⁾This information is out of the AENOR Mark and ENAC accreditation scopes. AENOR is not responsible for the information in this square

Water repellent treatment if is requested